

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventorship.....Soderberg et al.  
Applicant..... Microsoft Corporation  
Attorney's Docket No. .... MS1-391US  
Title: Methods and Apparatus for Parsing Extensible Markup Language (XML) Data Streams

TRANSMITTAL LETTER AND CERTIFICATE OF MAILING

To: Commissioner of Patents and Trademarks,  
Washington, D.C. 20231

From: Lance R. Sadler (Tel. 509-324-9256; Fax 509-323-8979)  
Lee & Hayes, PLLC  
421 W. Riverside Avenue, Suite 500  
Spokane, WA 99201

The following enumerated items accompany this transmittal letter and are being submitted for the matter identified in the above caption.

1. Specification—title page, plus 32 pages, including 33 claims and Abstract
2. Transmittal letter including Certificate of Express Mailing
3. 6 Sheets Formal Drawings (Figs. 1-6)
4. Return Post Card


Large Entity Status [x]

Small Entity Status [ ]

Date:

7/26/99

By:

  
Lance R. Sadler  
Reg. No. 38,605

CERTIFICATE OF MAILING

I hereby certify that the items listed above as enclosed are being deposited with the U.S. Postal Service as either first class mail, or Express Mail if the blank for Express Mail No. is completed below, in an envelope addressed to The Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the below-indicated date. Any Express Mail No. has also been marked on the listed items.


Express Mail No. (if applicable)

EL427252918

Date:

July 26, 1999

By:

  
Helen M. Hare

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

**Methods and Apparatus for Parsing Extensible Markup  
Language (XML) Data Streams**

Inventor(s):  
Joel Soderberg  
Brian Deen

ATTORNEY'S DOCKET NO. MS1-391US

## **TECHNICAL FIELD**

This invention relates to methods and apparatus for parsing Extensible Markup Language (XML) data streams. In particular, the invention pertains to server-side XML data stream parsing.

## **BACKGROUND**

Extensible Markup Language (XML) is a meta-markup language that provides a format for describing structured data. XML is similar to HTML in that it is a tag-based language. By virtue of its tag-based nature, XML defines a strict tree structure or hierarchy. XML is a subset of Standard Generalized Markup Language (SGML) that provides a uniform method for describing and exchanging structured data in an open, text-based format, and delivers this data by use of standard HTTP protocol. XML utilizes the concepts of elements and namespaces. Compared to HTML, XML facilitates more precise declarations of content and more meaningful data across multiple platforms.

XML "elements" are structural constructs that consist of a start tag, an end or close tag, and the information or content that is contained between the tags. A start tag is formatted as "<tag name>" and an end tag is formatted as "</tag name>". In an XML document, start and end tags can be nested within other start and end tags. All elements that occur within a particular element must have their start and end tags occur before the end tag of that particular element. This defines a strict tree-like structure that can be used to generate an XML document, or by an XML parser to organize and parse the XML document. Each element forms a node in this tree, and potentially has "child" or "branch" nodes. The child nodes

1 represent any XML elements that occur within the start and end tags of the  
2 "parent" node.

3 XML accommodates an infinite number of data schemas. Within each  
4 schema, data is represented by element names. Each schema is able to define its  
5 own "dictionary" of element names, referred to as a "namespace." Namespace  
6 identifiers are used within an XML document to qualify element names, thereby  
7 allowing the same names to be used within different schemas without accidental  
8 conflicts.

9 Namespace inheritance within an XML document allows non-qualified  
10 names to use "default" namespaces. The default namespace for any particular  
11 XML element is whatever namespace is applicable to the parent of the particular  
12 element. A namespace specification within an XML document is said to have a  
13 "scope" which includes all child nodes beneath the namespace specification.

14 Typically, XML documents get exchanged between different entities, such  
15 as client and server computers, in the form of requests and responses. A client  
16 might generate a request for information or a request for a certain server action,  
17 and a server might generate a response to the client that contains the information  
18 or confirms whether the certain action has been performed. Part of the document  
19 exchange process between clients and servers involves parsing the XML  
20 documents when they are received. In many cases, it is convenient to represent  
21 these XML documents in memory as a hierarchical tree structure. Once the  
22 hierarchical tree structure is built, the actual parsing process can begin. Consider  
23 the following exemplary XML code:

24  
25 `<orders xmlns:person="http://www.schemas.org/people"  
xmlns:dsig="http://dsig.org">`

```

1      <order>
2          <sold-to>
3              <person:name>
4                  <person:last-name>Layman</person:last-name>
5                  <person:first-name>Andrew</person:first-name>
6              </person:name>
7          </sold-to>
8          <sold-on>1997-03-17</sold-on>
9          <dsig:digital-signature>1234567890</dsig:digital-
10 signature>
11      </order>
12 </orders>

```

This code includes two XML namespace declarations that are each designated with “xmlns”. The declarations include a prefix, e.g. “person” and “dsig” respectively, and the expanded namespace to which each prefix refers, e.g. “http://www.schemas.org/people”, and “http://dsig.org” respectively. This code tells any reader that if an element name begins with “dsig:” its meaning is defined by whoever owns the “http://www.dsig.org” namespace. Similarly, elements beginning with the “person:” prefix have meanings defined by the “http://www.schemas.org/people” namespace.

Namespaces ensure that element names do not conflict, and clarify who defined which term. They do not give instructions on how to process the elements. Readers still need to know what the elements mean and decide how to process them. Namespaces simply keep the names straight.

Fig. 1 shows how the structure of the above code can be represented in a hierarchical tree structure. In Fig. 1, all of the elements or nodes are set out in an exemplary tree that represents the XML document. Such a structure is typically constructed in memory, with each node containing all data necessary for the start and end tags of that node.

1 It has been typical in the past to build the entire tree structure, such as the  
2 one shown in Fig. 1, before parsing the XML document. For large XML  
3 documents, this can consume a great deal of memory and processor time. Thus, it  
4 would be desirable to avoid this process if at all possible.

5 XML parsers are used by various applications to process XML documents.  
6 Parsers must know what particular elements mean and how to process them. Tags  
7 from multiple namespaces can be mixed, which is essential with data coming from  
8 multiple sources across the Web. With namespaces, both elements could exist in  
9 the same XML-based document instance but could refer back to two different  
10 schemas, uniquely qualifying their semantics. Parsers typically take the form of a  
11 code library that can be used by developers in conjunction with higher level  
12 languages such as C++ or Java. Using functions provided by such a code library,  
13 developers can access the structure of an XML document, enumerate its elements  
14 and their attributes, and manipulate the information that is contained within the  
15 document's prolog. A simple example would be an XML parser utility that checks  
16 for "well-formed" or "valid" documents, and serves as the equivalent of an HTML  
17 syntax checker.

18 XML parsers typically read XML files or data streams and construct a  
19 hierarchically structured tree, such as the one appearing in Fig. 1, as a data  
20 structure in memory. The XML parser then typically hands off this data structure  
21 data to viewers and other applications for processing. So, in the example XML  
22 code discussed above, a parser would first build the entire tree structure that is  
23 shown in Fig. 1 prior to parsing the document. Only after the entire tree structure  
24 was built in memory would the parser begin to start parsing the document.  
25

One problem that is associated with XML parsers such as this is that they have to build an entire hierarchically structured tree in memory before parsing the XML data stream that defined the tree. This approach is not efficient because of the demands it places on the memory that is required to store the tree structure and the speed with which information can be conveyed to a client. For example, this type of approach is not efficient for an application that is doing work in connection with a large quantity of XML data that might be streaming in at a relatively slow speed. Consider, for example, that a client asks a server for a list of all messages of a certain type that are in a certain folder. The entire message list is going to be returned by the server as one large data stream. If the client has to wait for the entire message list to be returned from the server, then the client cannot begin to display any portion of the list until all of the data has been received. This approach requires a large memory overhead (for storing the XML data and building the hierarchical tree structure) which, in turn, impacts the speed with which responses can be used by client applications.

In addition, server-side parsing can be slowed down when an XML data stream includes information that is not understood by the parser. Typically, the parser must process this information regardless of whether it is understood or not.

This invention arose out of concerns associated with providing improved XML parsers and methods of parsing XML data streams that reduce memory overhead and increase the speed with which XML data can be provided and used by a client.

## **SUMMARY**

Methods and structures for parsing an Extensible Markup Language (XML) data stream are described. In the described embodiment, one or more schema modules are defined and are associated with HTTP requests that are received from a client. The schema module(s) has a function that determines whether an XML data stream conforms to a given schema that is associated with the HTTP request. If a portion of the XML data stream does not conform to the given schema, then the schema module disregards that XML data stream portion.

In the described embodiment, each schema module has a plurality of states associated therewith. Each state is associated with one or more schema requirements that relate to a particular element that is evaluated by the schema module. Each state is different from the other states and the number of states is a function of the number of layers or elements that are contained within a particular XML data stream. The schema module(s) use each of its states to evaluate portions of an XML document that is received for compliance with the schema requirement for that document.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is an exemplary hierarchical tree structure that represents an XML document that is discussed in the "Background" section.

Fig. 2 is a block diagram that illustrates an exemplary client/server architecture that is suitable for exchanging XML documents.

Fig. 3 is a diagram of a computer system that can be used to implement various embodiments of the invention.



1 Fig. 4 is a high level block diagram that illustrates aspects of a server in  
2 accordance with one embodiment of the invention.

3 Fig. 5 is a high level block diagram that illustrates aspects of a server in  
4 accordance with one embodiment of the invention.

5 Fig. 6 is a flow diagram that describes steps in a method in accordance with  
6 one embodiment of the invention.

## 7 8 **DETAILED DESCRIPTION**

### 9 **Overview**

10 Various aspects of the invention provide methods and structures for  
11 facilitating server-side XML parsing and for making the parsing activities more  
12 timely and efficient. To do this, recognition is made of the fact that many XML  
13 requests that are received by a server have a common schema or schemas. More  
14 specifically, the server is designed to receive requests that are in one of a small set  
15 of fixed schemas that it understands. A schema is a formal specification of  
16 element names that indicates which elements are allowed in an XML document,  
17 and in which combinations. By knowing ahead of time the particular schemas that  
18 might characterize an XML request, measures can be taken to ensure that the  
19 request does indeed conform to the schema and that information that is contained  
20 in the XML request that does not conform to the schema is ignored or disregarded.

21 In addition, by knowing the particular schemas that will likely be  
22 encountered, parsing activities can be tailored for speed and efficiency. One way  
23 that this is done is to define each schema in terms of one or more states. That is,  
24 each schema can be considered to have a number of states. The number of states  
25 of a particular schema relate to how many layers of elements there are in that

1 schema. For each layer of elements—or for each state—there are processing  
2 characteristics that are unique for that state. These processing characteristics can  
3 be used to define a set of rules that then define how processing for a particular  
4 state is to be carried out. For example, for a particular schema, at one state there  
5 may only be one particular type of element that can occur. Thus, if an element  
6 that is different from or in addition to the one particular type of element occurs at  
7 that state, then measures can be taken to deal with the element that is not supposed  
8 to be present at that particular state, e.g. it can be ignored and/or an appropriate  
9 message can be returned. Thus, by knowing the state of the schema at any  
10 particular time and the processing requirements that are associated with that state,  
11 server-side parsing can be greatly streamlined.

### 12 13 **Exemplary Architecture**

14 Before describing the various inventive methods and structures that are  
15 used in implementing the various parsing functions described below, reference is  
16 made to Fig. 2 which shows but one example of an architecture that is suitable for  
17 use in connection with various embodiments of the invention. It is to be  
18 understood that the architecture that is described constitutes but one example and  
19 is not intended to limit the invention in any way.

20 A client is shown generally at 10 and includes an application 12, a transport  
21 object 14, a TCP/IP module 16 and a parser 18. An exemplary application is one  
22 that generates requests for XML data that are sent to transport object 14, and  
23 receives responses to its request in the form of XML data streams that must be  
24 parsed. One specific example of an application is Microsoft's Outlook Express.  
25 Transport object 14 can be any transport object that is used in connection with

1 sending and receiving requests. In one specific example that transport object can  
2 be a Distributed Authoring and Versioning (DAV) transport object that is designed  
3 to work in connection with DAV requests and responses. Specific examples of  
4 these are given later in the document. The TCP/IP module 16 can be any suitable  
5 module. In operation, an application typically generates a request that will be sent  
6 through the transport object 14 and the TCP/IP module 16 to a server 20. The  
7 server receives the request, processes it, and returns an XML data stream to the  
8 client. Exemplary processing that takes place at the server 20 is described in more  
9 detail in connection with Figs. 4 and 5. The XML data that is returned from the  
10 server is received into the TCP/IP module 16 and the transport object 14. The  
11 transport object will then begin pushing the data into the parser 18. The parser 18  
12 then begins to operate on the XML data stream by parsing it and providing it to the  
13 application 12. In this example, parser 18 is a so-called "node factory" parser  
14 because the parser calls a factory object rather than creating nodes manually.

### 16 **Exemplary Computer System**

17 Fig. 3 shows a general example of a computer 130 that can be used to  
18 implement client and/or server machines. Computer 130 includes one or more  
19 processors or processing units 132, a system memory 134, and a bus 136 that  
20 couples various system components including the system memory 134 to  
21 processors 132. The bus 136 represents one or more of any of several types of bus  
22 structures, including a memory bus or memory controller, a peripheral bus, an  
23 accelerated graphics port, and a processor or local bus using any of a variety of  
24 bus architectures. The system memory 134 includes read only memory (ROM)  
25 138 and random access memory (RAM) 140. A basic input/output system (BIOS)

1 142, containing the basic routines that help to transfer information between  
2 elements within computer 130, such as during start-up, is stored in ROM 138.

3 Computer 130 further includes a hard disk drive 144 for reading from and  
4 writing to a hard disk (not shown), a magnetic disk drive 146 for reading from and  
5 writing to a removable magnetic disk 148, and an optical disk drive 150 for  
6 reading from or writing to a removable optical disk 152 such as a CD ROM or  
7 other optical media. The hard disk drive 144, magnetic disk drive 146, and optical  
8 disk drive 150 are connected to the bus 136 by an SCSI interface 154 or some  
9 other appropriate interface. The drives and their associated computer-readable  
10 media provide nonvolatile storage of computer-readable instructions, data  
11 structures, program modules and other data for computer 130. Although the  
12 exemplary environment described herein employs a hard disk, a removable  
13 magnetic disk 148 and a removable optical disk 152, it should be appreciated by  
14 those skilled in the art that other types of computer-readable media which can  
15 store data that is accessible by a computer, such as magnetic cassettes, flash  
16 memory cards, digital video disks, random access memories (RAMs), read only  
17 memories (ROMs), and the like, may also be used in the exemplary operating  
18 environment.

19 A number of program modules may be stored on the hard disk 144,  
20 magnetic disk 148, optical disk 152, ROM 138, or RAM 140, including an  
21 operating system 158, one or more application programs 160, other program  
22 modules 162, and program data 164. A user may enter commands and  
23 information into computer 130 through input devices such as a keyboard 166 and a  
24 pointing device 168. Other input devices (not shown) may include a microphone,  
25 joystick, game pad, satellite dish, scanner, or the like. These and other input

1 devices are connected to the processing unit 132 through an interface 170 that is  
2 coupled to the bus 136. A monitor 172 or other type of display device is also  
3 connected to the bus 136 via an interface, such as a video adapter 174. In addition  
4 to the monitor, personal computers typically include other peripheral output  
5 devices (not shown) such as speakers and printers.

6 Computer 130 commonly operates in a networked environment using  
7 logical connections to one or more remote computers, such as a remote computer  
8 176. The remote computer 176 may be another personal computer, a server, a  
9 router, a network PC, a peer device or other common network node, and typically  
10 includes many or all of the elements described above relative to computer 130,  
11 although only a memory storage device 178 has been illustrated in Fig. 3. The  
12 logical connections depicted in Fig. 3 include a local area network (LAN) 180 and  
13 a wide area network (WAN) 182. Such networking environments are  
14 commonplace in offices, enterprise-wide computer networks, intranets, and the  
15 Internet.

16 When used in a LAN networking environment, computer 130 is connected  
17 to the local network 180 through a network interface or adapter 184. When used  
18 in a WAN networking environment, computer 130 typically includes a modem 186  
19 or other means for establishing communications over the wide area network 182,  
20 such as the Internet. The modem 186, which may be internal or external, is  
21 connected to the bus 136 via a serial port interface 156. In a networked  
22 environment, program modules depicted relative to the personal computer 130, or  
23 portions thereof, may be stored in the remote memory storage device. It will be  
24 appreciated that the network connections shown are exemplary and other means of  
25 establishing a communications link between the computers may be used.

1 Generally, the data processors of computer 130 are programmed by means  
2 of instructions stored at different times in the various computer-readable storage  
3 media of the computer. Programs and operating systems are typically distributed,  
4 for example, on floppy disks or CD-ROMs. From there, they are installed or  
5 loaded into the secondary memory of a computer. At execution, they are loaded at  
6 least partially into the computer's primary electronic memory. The invention  
7 described herein includes these and other various types of computer-readable  
8 storage media when such media contain instructions or programs for implementing  
9 the steps described below in conjunction with a microprocessor or other data  
10 processor. The invention also includes the computer itself when programmed  
11 according to the methods and techniques described below.

12 For purposes of illustration, programs and other executable program  
13 components such as the operating system are illustrated herein as discrete blocks,  
14 although it is recognized that such programs and components reside at various  
15 times in different storage components of the computer, and are executed by the  
16 data processor(s) of the computer.

### 17 18 WebDAV

19 One of the areas of application for the described embodiment is in the  
20 context of preparing and sending responses to client Web Distributed Authoring  
21 and Versioning (WebDAV) requests. WebDAV is an extension to the HTTP/1.1  
22 protocol that allows clients to perform remote web content authoring operations.  
23 This extension provides a coherent set of methods, headers, request entity body  
24 formats, and response entity body formats that provide operations for properties,  
25 collections, locking and namespace operations. With respect to properties,

1 WebDAV provides the ability to create, remove, and query information about  
2 Web pages, such as their authors, creation dates, etc. With respect to collections,  
3 WebDAV provides the ability to create sets of documents and to retrieve a  
4 hierarchical membership listing (like a directory listing in a file system). With  
5 respect to locking, WebDAV provides the ability to keep more than one person  
6 from working on a document at the same time. This prevents the "lost update  
7 problem," in which modifications are lost as first one author then another writes  
8 changes without merging the other author's changes. With respect to namespace  
9 operations, WebDAV provides the ability to instruct the server to copy and move  
10 Web resources.

11 In HTTP/1.1, method parameter information is exclusively encoded in  
12 HTTP headers. Unlike HTTP/1.1, WebDAV encodes method parameter  
13 information either in an Extensible Markup Language (XML) request entity body,  
14 or in an HTTP header. The use of XML to encode method parameters is  
15 motivated by the ability to add extra XML elements to existing structures, provide  
16 extensibility; and by XML's ability to encode information in ISO 10646 character  
17 sets, providing internationalization support. In addition to encoding method  
18 parameters, XML is used in WebDAV to encode the responses from methods,  
19 providing the extensibility and internationalization advantages of XML for method  
20 output, as well as input.

21 The following WebDAV HTTP methods use XML as a request and  
22 response format. The reader is assumed to have some familiarity with WebDAV  
23 HTTP methods or verbs. A brief description, however, of some pertinent  
24 WebDAV HTTP methods or verbs appears in the table immediately below:  
25

## WebDAV HTTP methods

PROPPATCH	The PROPPATCH method processes instructions specified in the request body to set and/or remove properties defined on the resource identified by the Request-URI.
PROPFIND	The PROPFIND method retrieves properties defined on the resource identified by the Request-URI, if the resource does not have any internal members, or on the resource identified by the Request-URI and potentially its member resources, if the resource is a collection that has internal member URIs.
LOCK	A LOCK method invocation creates the lock specified by the lockinfo XML element on the Request-URI. Lock method requests <b>SHOULD</b> have a XML request body which contains an owner XML element for this lock request, unless this is a refresh request. The LOCK request may have a Timeout header. The LOCK is used to take out a lock of any access type.
UNLOCK	The UNLOCK method removes the lock identified by the lock token in the Lock-Token request header from the Request-URI, and all other resources included in the lock.
MOVE	The MOVE operation on a non-collection resource is the logical equivalent of a copy (COPY), followed by consistency maintenance processing, followed by a delete of the source, where all three actions are performed automatically. The consistency maintenance step allows the server to perform updates caused by the move, such as updating all URIs other than the Request-URI which identify the source resource, to point to the new destination resource. Consequently, the Destination header <b>MUST</b> be present on all MOVE methods and <b>MUST</b> follow all COPY requirements for the COPY part of the MOVE method.
COPY	The COPY method creates a duplicate of the source resource, identified by the Request-URI, in the destination resource, identified by the URI in the Destination header.
SEARCH	The SEARCH method allows queries against the different properties.
MKCOL	The MKCOL method is used to create a new collection.

### Request Processing Overview

Fig. 4 shows a high level block diagram of parsing system at server 20 that includes an XML parser 100, a node factory 102 communicatively associated with the parser 100, and a schema module 104 communicatively associated with the node factory 102. XML parser 100 typically takes XML input in a variety of ways. This XML input is referred to as an "XML data stream" in this document. The variety of ways that the parser can receive XML input include via a stream, a URL to a document, or text that is pushed to it. As the XML parser 100 parses the XML data stream, it sends parse events to node factory 102. These events are sent to the node factory 102 in the form of a series of method calls that the node factory 102 supports. The method calls enable the node factory to build the elements or



1 nodes that represent the XML document that is characterized by the XML data  
2 stream that parser 100 receives. The node factory 102 is primitive in a sense in  
3 that it builds the nodes of the XML document that the parser 100 tells it to. For  
4 any given XML schema, one or more of the nodes that get built by the node  
5 factory 102, or the information that is contained in a particular node may not be  
6 germane or necessary and, in fact, can be erroneous.

7 The schema module 104 is provided as an interface with the node factory  
8 104. Schema modules can be built for each and every particular type of schema  
9 that might be expected to be received by the server. Thus, each schema module  
10 that might be built is specialized for handling one particular type of schema (or a  
11 plurality of similar schemas). The schema module knows the particular processing  
12 requirements of its associated schema, the rules that are associated with a  
13 particular schema's structure and what is necessary in order for the schema to be  
14 properly processed by the server so that an appropriate response can be returned to  
15 the client. If any of the rules for a particular schema are violated, the schema  
16 module can take appropriate action. In this example, an appropriate action might  
17 be to ignore the information that is erroneous to, and not understood by the  
18 schema module. Such action might also include generating a particular error  
19 message and returning the error message to the node factory 102. By ignoring the  
20 information that is not understood by the schema module, parsing activities are  
21 made more efficient because this information does not have to be further  
22 processed by the server in order to build and return a response to the client. The  
23 server might simply return an error message that indicates that this particular  
24 information is not understood by the server.

1 The schema module system gives the server the ability to ignore  
2 information that is not properly part of a known schema and to parse an XML  
3 document based upon the state of the XML data stream at which parsing is taking  
4 place.

### 6 Exemplary Schema

7 When a client's request is received, it has a particular schema associated  
8 with it. Each HTTP request (whether an HTTP/1.1 request or a WebDAV request)  
9 has a particular schema associated with it. As an example, consider the WebDAV  
10 PROPFIND request below:

```
11 PROPFIND/file HTTP/1.1
12 Host: www.foo.bar
13 Content-type: text/xml; charset="utf-8"
14 Content-Length: xxxx

15 <?xml version="1.0" encoding="utf-8" ?>
16 <D:propfind xmlns:D="DAV:">
17   <D:prop xmlns:R="http://www.foo.bar/boxschema/">
18     <R:bigbox/>
19     <R:author/>
20     <R:DingALing/>
21     <R:Random/>
22   </D:prop>
23 </D:propfind>
```

18  
19 In this example, PROPFIND is executed on a non-collection resource  
20 http://www.foo.bar/file. The "propfind" XML element specifies the name of four  
21 properties, e.g. bigbox, author, DingALing, and Random whose values are being  
22 requested. The schema of this PROPFIND request specifies the element names,  
23 e.g. "propfind", "prop", and "allprop", thereby indicating which elements are  
24 allowed in an XML document, in which combinations, and in which order.  
25 Although the "allprop" element does not appear in this exemplary request, it could

be used to request all of the properties of an identified resource. Its proper place in the schema would be inside the "propfind" element.

### Schema Modules

Fig. 5 shows an exemplary architecture that is suitable for use in processing five different types of requests that might be received by server 20, i.e. PROPFIND, PROPPATCH, SEARCH, LOCK, and UNLOCK requests. For each type of request that might be received from the server, a schema module is defined. The collection of schema modules can be implemented as programming objects that have data and associated methods. In this example, four schema modules 104a, 104b, 104c, and 104d are defined for the five requests listed above. The CLock module 104d is provided for both the LOCK and UNLOCK requests because of similarities that these requests share.

When an XML data stream is received into parser 100, it begins parsing the data stream and making various calls on the node factory 102. An exemplary interface that is supported by the node factory 102 is given below. It is to be understood that this constitutes but one exemplary interface and is not intended to be limiting in any way.

```
interface IXMLNodeFactory : IUnknown
{
    HRESULT NotifyEvent(
        [in] IXMLNodeSource* pSource,
        [in] XML_NODEFACTORY_EVENT iEvt);

    HRESULT BeginChildren(
        [in] IXMLNodeSource* pSource,
        [in] XML_NODE_INFO* pNodeInfo);

    HRESULT EndChildren(
        [in] IXMLNodeSource* pSource,
        [in] BOOL fEmpty,
        [in] XML_NODE_INFO* pNodeInfo);
}
```

```

1      HRESULT Error(
2          [in] IXMLNodeSource* pSource,
3          [in] HRESULT hrErrorCode,
4          [in] USHORT cNumRecs,
5          [in] XML_NODE_INFO __RPC_FAR **aNodeInfo);

6      HRESULT CreateNode(
7          [in] IXMLNodeSource __RPC_FAR *pSource,
8          [in] PVOID pNodeParent,
9          [in] USHORT cNumRecs,      [in] XML_NODE_INFO __RPC_FAR
10         **aNodeInfo);
11
12     };

```

To assist in understanding the node factory 102 interface, the XML\_NODE\_INFO structure that is used by the interface is shown below, along with a table that explains its components:

```

11 typedef struct _XML_NODE_INFO
12 {
13     DWORD      dwSize;
14     DWORD      dwType;
15     DWORD      dwSubType;
16     BOOL       fTerminal;
17     WCHAR*     pwcText;
18     ULONG      ulLen;
19     ULONG      ulNsPrefixLen;
20     PVOID      pNode;
21     PVOID      pReserved;
22 } XML_NODE_INFO;

```

DWORD dwSize	The size of this structure in bytes.
DWORD dwType	The node type.
DWORD dwSubType	The node sub type.
BOOL fTerminal	True if this node cannot have any children and so BeginChildren and EndChildren are guaranteed not to be called for this node.
const WCHAR* pwcText	This is either a tag name, or a PCDATA text value. The lifetime of this pointer is the lifetime of the CreateNode call. Note that Element/Attribute/PI tag names or certain attribute values (of type ID, NMTOKEN, ENTITY, or NOTATION), may have namespace prefixes.
ULONG ulLen	The length of the element or attribute name.
ULONG ulNsPrefixLen	The length of the namespace prefix, when present.

PVOID pNode	This field can be used by the NodeFactory to RETURN an object representing the node. Since this is PVOID, the NodeFactory can build ANY tree representation it wants - even a raw struct hierarchy.
PVOID * pReserved	For private communication between factories.

If a non-NULL pointer is returned in the pNode field of the NodeInfo struct then this will be passed back in by the parser as the pNodeParent in subsequent calls to CreateNode for the children of that node. In other words, the XML Parser maintains the parse context for you and passes in the appropriate parent pointer based on what it finds in the XML. The pNodeParent for root level nodes is equal to the argument provided in the SetRoot call on the Parser.

The following table sets out a brief explanation of the methods that are supported by the node factory 102 interface set out above:

Method	Description
NotifyEvent	This method tells the NodeFactory where the parser is in the XML document. Some of the possible events include: (1) document start, (2) the parser is about to start parsing a DTD file, (3) DTD file is finished, (4) the parser is about to start the DTD internal subset, (5) the internal subset is finished, (6) parser is about to call CreateNode, (7) start entity, (8) end entity, (9) end document, and (10) more data has just arrived.
BeginChildren	This method is called when a node may contain children. For example the node "<foo name='123'>" may contain children. But nodes that are empty like "<foo name='123'>", comment nodes, CDATA nodes, and text nodes will not have a BeginChildren call. You can tell if a node was empty at EndChildren time by checking the boolean argument fEmpty.
EndChildren	This method is called when all the subelements of the given element are complete. In other words the matching end tag </FOO> has been reached. This is also called if the tag is an empty tag <FOO ... /> in which case the fEmpty argument is set to TRUE in case the NodeFactory needs to distinguish between this case and <FOO></FOO>. This method is not called for terminal nodes.
Error	This method is called when the parser runs into an error in the XML document. The parser will stop at this point and return the HRESULT error code to the caller. The NodeFactory can call back to the parser to get more information about the error.
CreateNode	CreateNode is the main method that gets called during parsing for every element.

1  
2 As the node factory 102 receives calls from the parser 100, it updates the  
3 state of the processing and builds the current request information. The schema  
4 modules, here modules 104a, 104b, 104c, and 104d interface with the node factory  
5 and, for each of their individual associated requests, ensure that the request  
6 conforms to the appropriate schema, and that the information that is contained in  
7 the XML request that does not conform to the schema is ignored or disregarded  
8 and/or appropriate messages are generated and sent to the appropriate entities, e.g.  
9 the node factory 102.

#### 10 11 Schema Module States

12 Each schema module is uniquely linked to a particular request type that  
13 might be received by the server. In some cases, request types, such as the LOCK  
14 and UNLOCK requests, can be represented by a common schema module because  
15 of shared similarities. Each schema module has one or more states associated with  
16 it that are unique to the particular schema with which is it associated. The states  
17 are tracked by the schema modules and assist the schema modules in verifying that  
18 the output of the node factory 102 contains a valid XML schema for that request.

19 In this example, the number of states of a particular schema relate to the  
20 number of layers of elements that there are in the schema. The states define at  
21 least one schema requirement relating to a particular element. Each layer of  
22 elements has processing characteristics that are unique for that state. The  
23 processing characteristics are used to define a set of rules for that state that define  
24 how processing for a particular state is to be carried out. In this example, the rules  
25

1 are schema-based rules that relate to an element's contents. For example, the rules  
2 can define which elements can be contained within other elements.

3 Each schema module keeps track of a state variable that tells the schema  
4 module where it is in the XML document. This, in turn, allows the schema  
5 module to apply the rules that are associated with each state to the data that it  
6 receives from the node factory 102. If one or more of the rules are violated, then  
7 the schema module is programmed to take an appropriate action. Appropriate  
8 actions can include ignoring any erroneous information and notifying the node  
9 factory that information has been received that does not conform to the schema  
10 with which that schema module is associated.

11 Fig. 6 is a flow diagram that describes steps in a method in accordance with  
12 one embodiment. Step 106 receives a request from a client and step 108  
13 determines the HTTP verb (WebDAV or otherwise) that is used in the client  
14 request. Step 110 selects a schema module that corresponds to the HTTP verb.  
15 For the selected schema module, step 112 gets the first schema module state. Step  
16 114 then applies a rule that is associated with the first schema module state to the  
17 client request. Step 116 determines whether the applied rule is violated. If the  
18 applied rule is violated, step 118 ignores the associated portion of the XML data  
19 stream that violates the rule. Step 120 then determines whether processing for the  
20 particular state is finished. If the processing for the particular state is not finished,  
21 then step 122 gets the next rule and loops back to step 114. If the state is finished,  
22 step 124 determines whether there are any additional states that need to be  
23 processed. If there are more states, then the method loops back to step 112 for the  
24 next state. If there are no additional states to process, then the schema module  
25 processing for the client request is terminated (step 126). At this point, the server

1 can continue to process the client request and return a response to the client.  
2 Advantageously, those portion of the client request that are not understood by the  
3 server have been excluded from further processing. This means that the server can  
4 concentrate on the information or data that it understands without being slowed  
5 down by having to process information that it does not understand.

6 As an example, consider the PROPFIND request below:

```
7  
8 PROPFIND /secure/hmdata/ HTTP/1.1  
9 Host: www.hotmail.com  
10 Depth: 0  
11  
12 <?xml version="1.0"?>  
13 <D:propfind xmlns:D="DAV:" xmlns:hm="urn:schemas:httpmail:"  
14     <D:prop>  
15         <hm:contacts/>  
16         <hm:inbox/>  
17         <hm:sendmsg/>  
18         <hm:sentitems/>  
19         <hm:deleteditems/>  
20         <hm:drafts/>  
21     </D:prop>  
22 </D:propfind>
```

23 When the PROPFIND request is received, the CFind schema module 104a  
24 (Fig. 5) is selected because it is associated with the PROPFIND request. The  
25 CFind schema module 104a has three states depending on the depth within the  
PROPFIND request. A first state is defined by the root of the document, i.e. the  
“propfind” element. The second state is defined by what appears inside the  
“propfind” element. The third state is defined by what appears inside the “prop”  
element. The processing that takes place at these states is different. For example,  
for a PROPFIND request, only a “propfind” element can be received at the first  
state or it is an error. Thus, there is a rule for the first state that specifies that the  
element that is received must be a “propfind” element. If the element is not a



1 “propfind” element, then that element and all its contents can be ignored. At the  
2 second state (inside the “propfind” element), the only elements that can be  
3 received are the “prop” and “allprop” elements. (The latter element retrieves all  
4 properties for a specified resource while the former retrieves only specified  
5 resource properties). Thus, there is a rule for the second state that specifies that  
6 the only recognized elements at the second state are the “prop” and “allprop”  
7 elements. If any other element is received within the “propfind” element, then it is  
8 an error and the contents of the other element can be ignored. When this happens,  
9 the CFind schema module 104a can ignore everything that is received for the  
10 erroneous element until a close tag for that element is received. When the close  
11 tag for that element is received, the schema module 104a can then begin to  
12 substantively process the information that it receives from the node factory. At the  
13 third state (inside the “prop” element), virtually any element can be received.  
14 These elements have to be interpreted because they can be a request for an  
15 arbitrary element. Thus, there is a rule for the third state that specifies that any  
16 element that is received within the “prop” element must be interpreted by the  
17 server.

18 As the schema modules process the XML representation provided by the  
19 node factory 102, data that are not ignored as part of the schema modules’  
20 evaluation are passed along within the server for further processing that includes  
21 generating and sending a client response.

22 The different states that are defined by each of the schema modules enables  
23 implementation of its particular schema in a hardwired, efficient way. Information  
24 for a schema that is not understood can be quickly disregarded. This greatly  
25 streamlines the server’s processing tasks because it is only necessary for the server

1 to process information with which the server is familiar. Thus, the server need not  
2 process erroneous information that might be sent in a request. Moreover, the state-  
3 based nature of the schema modules provides a quick and efficient way to  
4 facilitate server-side parsing when different constrained schemas are expected.

5 Although the invention has been described in language specific to structural  
6 features and/or methodological steps, it is to be understood that the invention  
7 defined in the appended claims is not necessarily limited to the specific features or  
8 steps described. Rather, the specific features and steps are disclosed as preferred  
9 forms of implementing the claimed invention.

## CLAIMS

1. A method of parsing an Extensible Markup Language (XML) data stream comprising:

defining a plurality of states, individual states being associated with individual elements of an XML data stream;

associating one or more rules with each state;

receiving an XML data stream;

evaluating the XML data stream against one or more of the rules for individual elements contained in the XML data stream; and

disregarding associated portions of the XML data stream if any of the rules that are associated with those portions are violated.

2. The method of claim 1, wherein the one or more rules relate to a schema of the XML data stream.

3. The method of claim 1, wherein:

the defining of the plurality of states comprises defining one or more schema modules that are configured to track one or more states of the XML data stream; and

the evaluating comprises using the one or more schema modules to evaluate the XML data stream against one or more schema-based rules.

1           4.     The method of claim 1, wherein the defining of the plurality of states  
2 comprises defining one or more schema modules that are configured to track one  
3 or more states of the XML data stream, each schema module being associated with  
4 at least one request type that defines the XML data stream.

5  
6           5.     The method of claim 4, wherein the request type is a WebDAV  
7 request type.

8  
9           6.     The method of claim 5, wherein the WebDAV request type is a  
10 PROPFIND request.

11  
12           7.     The method of claim 5, wherein the WebDAV request type is a  
13 PROPPATCH request.

14  
15           8.     The method of claim 5, wherein the WebDAV request type is a  
16 SEARCH request.

17  
18           9.     The method of claim 5, wherein the WebDAV request type is one of  
19 a LOCK and UNLOCK request.

20  
21           10.    The method of claim 1 further comprising defining one or more  
22 rules that relate to an element's contents.

1           11.    The method of claim 10, wherein said one or more rules that relate  
2 to an element's contents define which elements can be contained within other  
3 elements.

4  
5           12.    The method of claim 11, wherein if a rule that defines which  
6 elements can be contained within other elements is violated, disregarding  
7 associated portions of the XML data stream until a close tag is received for an  
8 element that violates the rule.

9  
10          13.    A computer-readable medium having a program thereon which,  
11 when executed by a computer, performs the steps of claim 1.

12  
13          14.    A method of parsing an Extensible Markup Language (XML) data  
14 stream comprising:

15           defining a schema module that is associated with an HTTP request type that  
16 is received from a client, the schema module having a function that determines  
17 whether an XML data stream conforms to a given schema that is associated with  
18 the HTTP request type;

19           evaluating an XML data stream with the schema module; and

20           disregarding a portion of the XML data stream if it does not conform to the  
21 given schema.

1       **15.**    The method of claim 14, wherein said defining of the schema  
2 module comprises defining a plurality of schema modules, individual schema  
3 modules being associated with different HTTP request types.

4  
5       **16.**    The method of claim 14, wherein said function determines whether  
6 there are any unauthorized elements that appear in a client's request.

7  
8       **17.**    The method of claim 14, wherein said function determines whether  
9 there are any unauthorized elements that appear in a client's request; said  
10 disregarding comprising disregarding said XML data stream portion until a close  
11 tag is received for an unauthorized element.

12  
13       **18.**    The method of claim 14, wherein said HTTP request type comprises  
14 a WebDAV request type.

15  
16       **19.**    The method of claim 18, wherein said WebDAV request type  
17 comprises a PROPFIND request.

18  
19       **20.**    The method of claim 18, wherein said WebDAV request type  
20 comprises a PROPPATCH request.

21  
22       **21.**    The method of claim 18, wherein said WebDAV request type  
23 comprises a SEARCH request.

1       **22.**   The method of claim 18, wherein said WebDAV request type  
2 comprises one of a LOCK and UNLOCK request.

3  
4       **23.**   A computer-readable medium having a program thereon which,  
5 when executed by a computer, performs the steps of claim 14.

6  
7       **24.**   An Extensible Markup Language (XML) parsing system  
8 comprising:

9       a parser configured to receive an XML data stream and generate a series of  
10 calls as it parses the XML data stream;

11       a node factory communicatively associated with the parser and configured  
12 to receive the parser's calls and responsive thereto construct a representation of the  
13 XML data stream that the parser is parsing; and

14       a schema module communicatively associated with the node factory and  
15 configured to evaluate the node factory's representation of the XML data stream  
16 and determine whether it conforms to a known schema.

17  
18       **25.**   The parsing system of claim 24, wherein said parsing system  
19 comprises a plurality of schema modules, each schema module being associated  
20 with a different known schema.

21  
22       **26.**   The parsing system of claim 24, wherein the schema module  
23 corresponds to an HTTP request type.

1       **27.**    The parsing system of claim 24, wherein said parsing system  
2 comprises a plurality of schema modules, each schema module being associated  
3 with a different known schema and corresponding to a different HTTP request  
4 type.

5  
6       **28.**    The parsing system of claim 27, wherein at least one of the different  
7 HTTP request types is a WebDAV request.

8  
9       **29.**    The parsing system of claim 24, wherein the schema module is  
10 configured to ignore an XML data stream portion that does not conform to the  
11 known schema.

12  
13       **30.**    An Extensible Markup Language (XML) parsing system  
14 comprising:

15       a collection of schema modules, each of which being configured to evaluate  
16 a different schema that is associated with an XML data stream; and

17       a plurality of states associated with each schema module, individual states  
18 of a schema module defining a schema requirement relating to a particular element  
19 that is evaluated by that schema module.

20  
21       **31.**    The parsing system of claim 30, wherein each schema module is  
22 associated with a different HTTP request and is configured to evaluate a schema  
23 that is associated with the HTTP request with which is it associated.




1           **32.**    The parsing system of claim 31, wherein at least one of the HTTP  
2 requests is a WebDAV request.


3  
4           **33.**    The parsing system of claim 31, wherein each of the HTTP requests  
5 is a WebDAV request.

## **ABSTRACT**

Methods and structures for parsing an Extensible Markup Language (XML) data stream are described. In the described embodiment, one or more schema modules are defined and are associated with HTTP requests that are received from a client. The schema module(s) has a function that determines whether an XML data stream conforms to a given schema that is associated with the HTTP request. If a portion of the XML data stream does not conform to the given schema, then the schema module disregards that XML data stream portion. In the described embodiment, each schema module has a plurality of states associated therewith. Each state is associated with one or more schema requirements that relate to a particular element that is evaluated by the schema module. Each state is different from the other states and the number of states is a function of the number of layers or elements that are contained within a particular XML data stream.

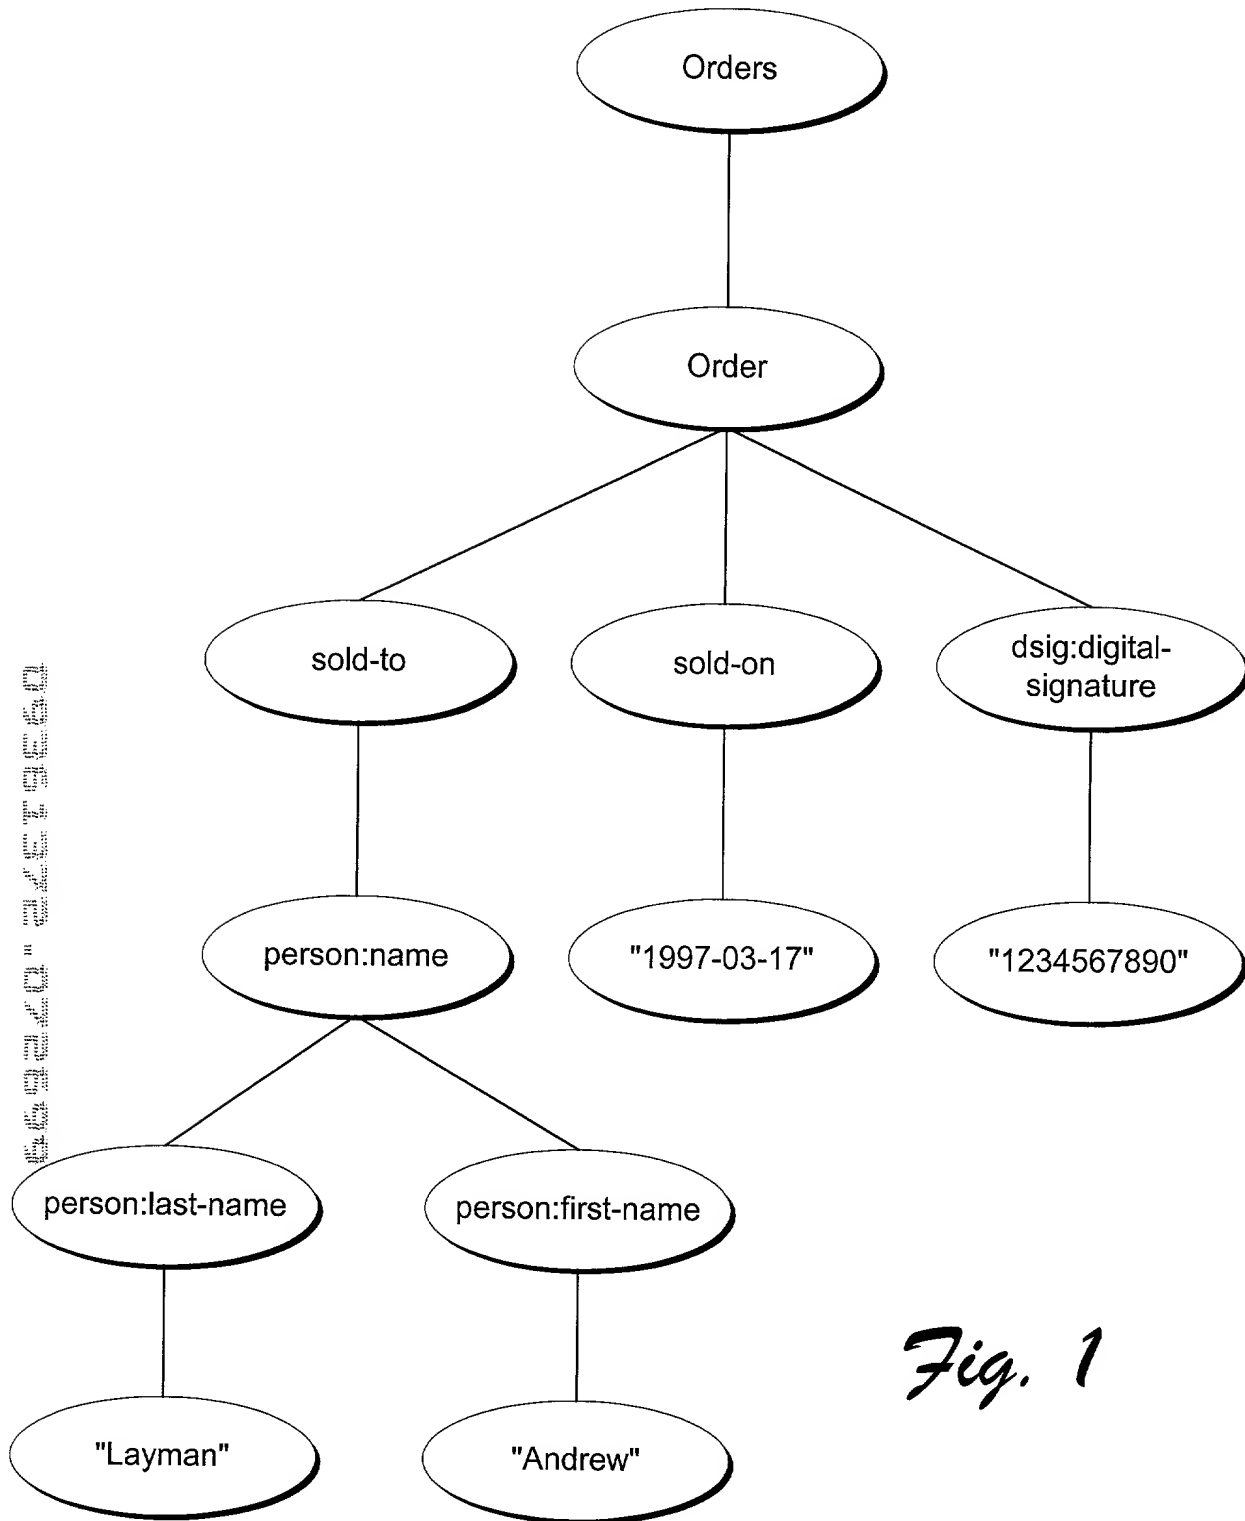



*Fig. 1*

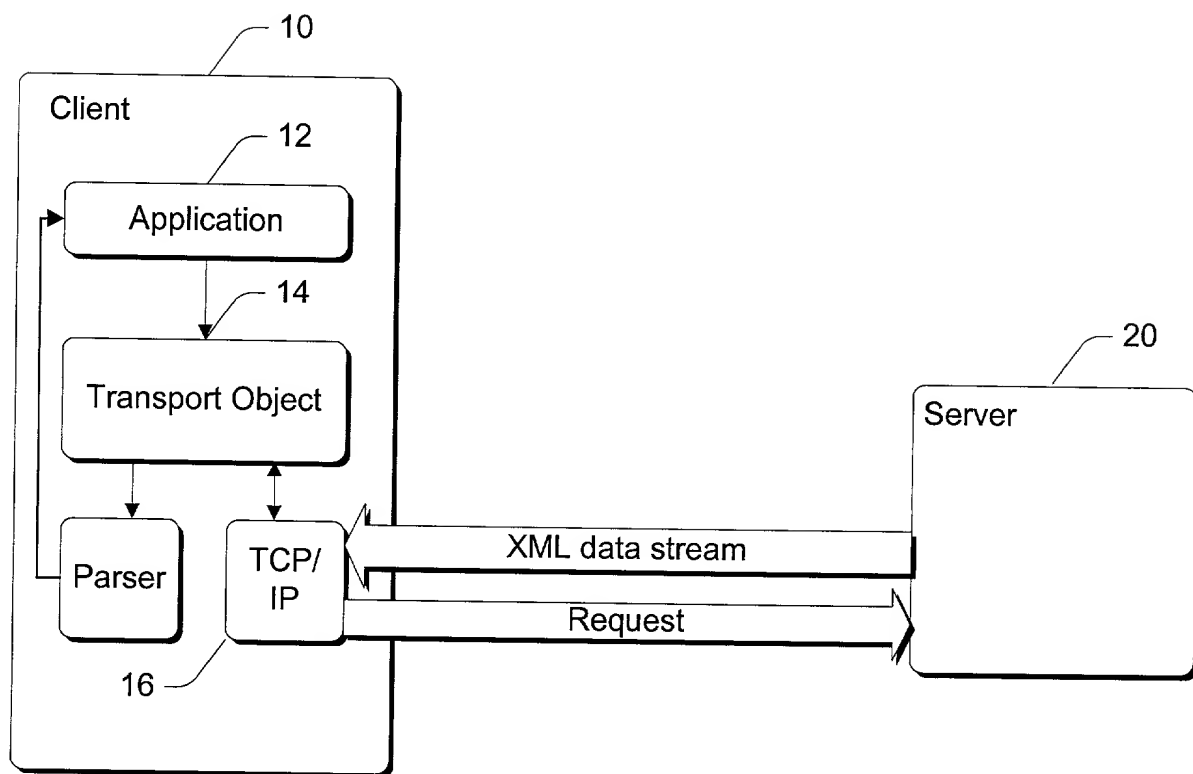


*Fig. 2*

Fig. 3

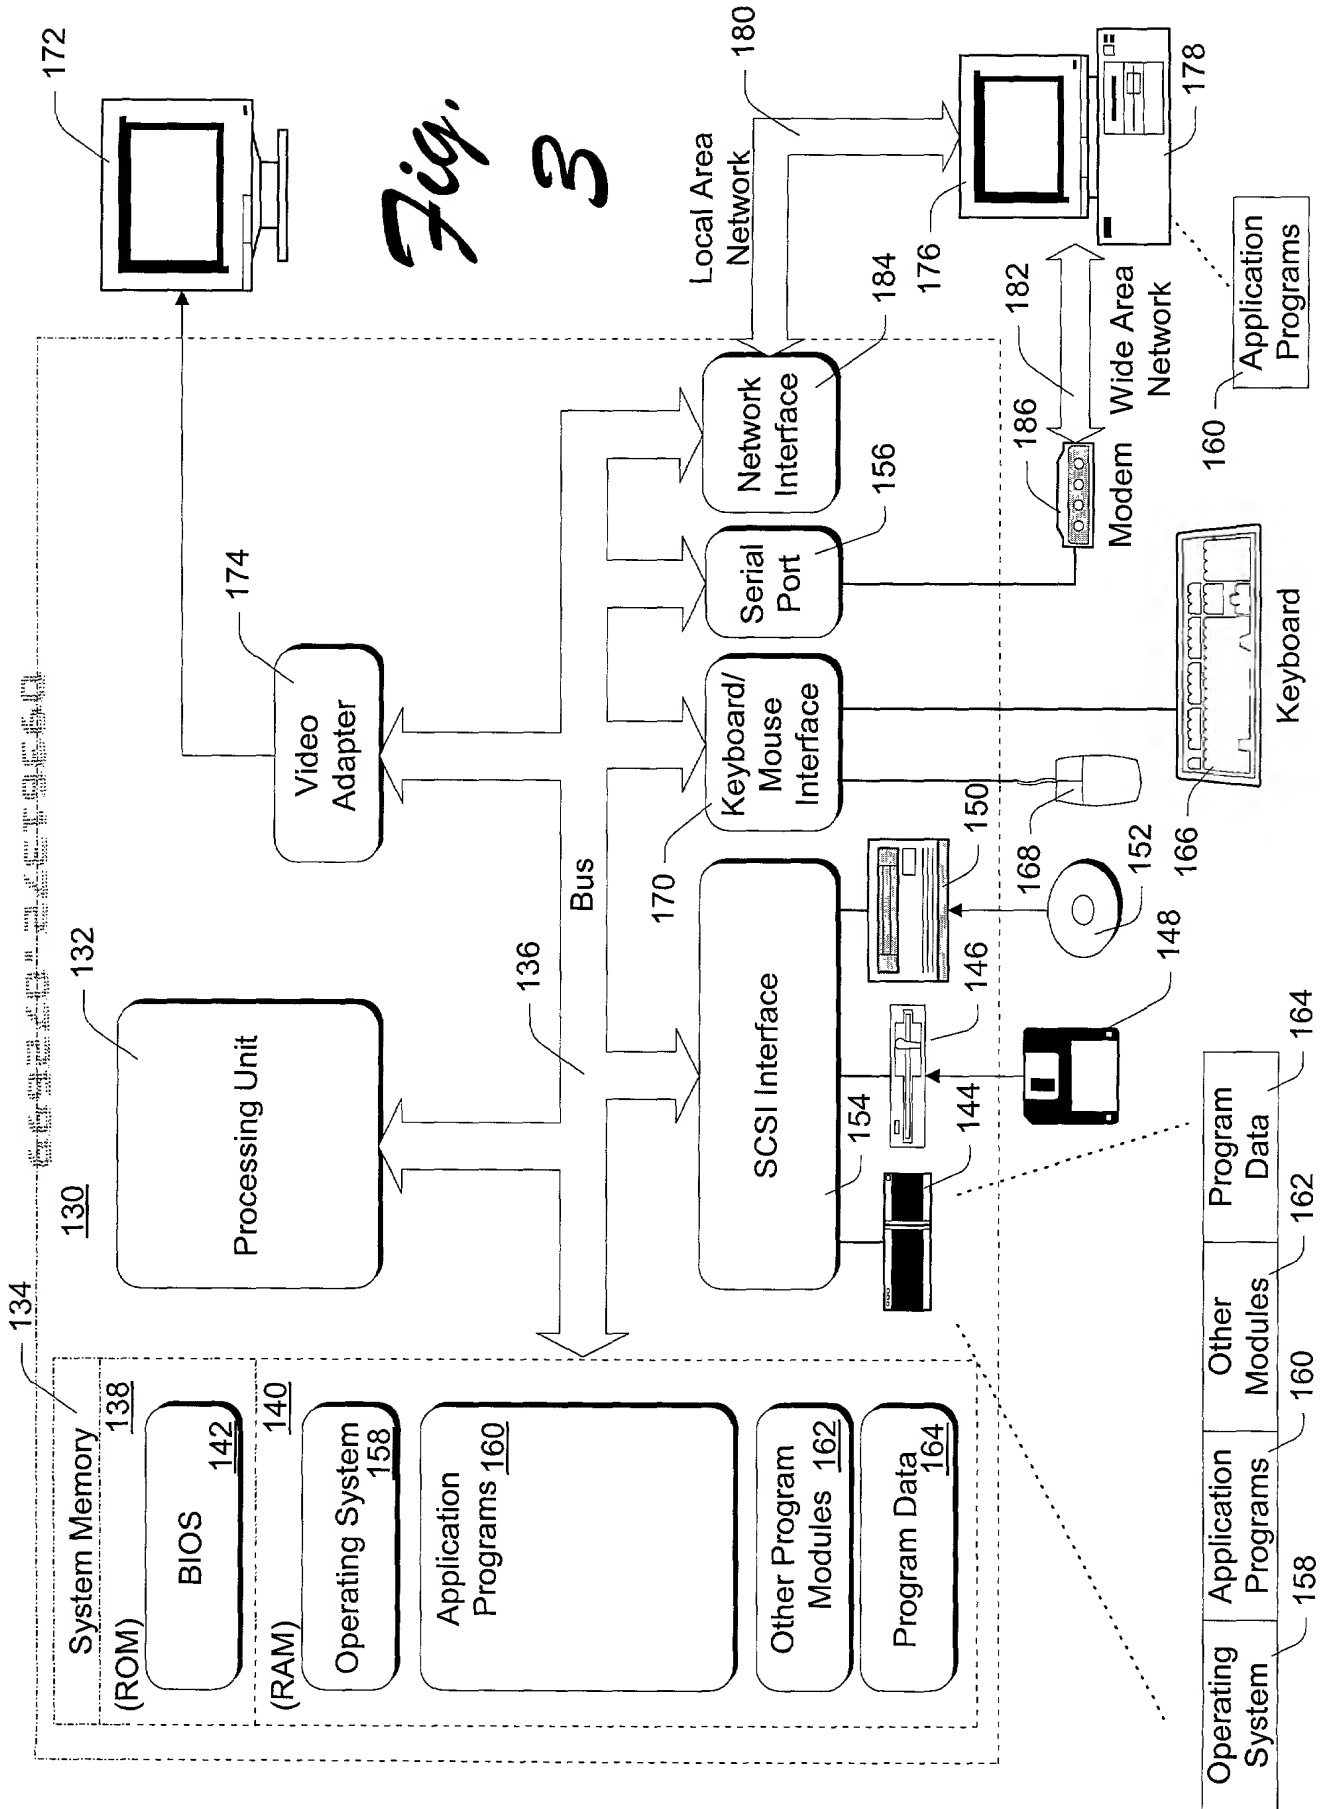

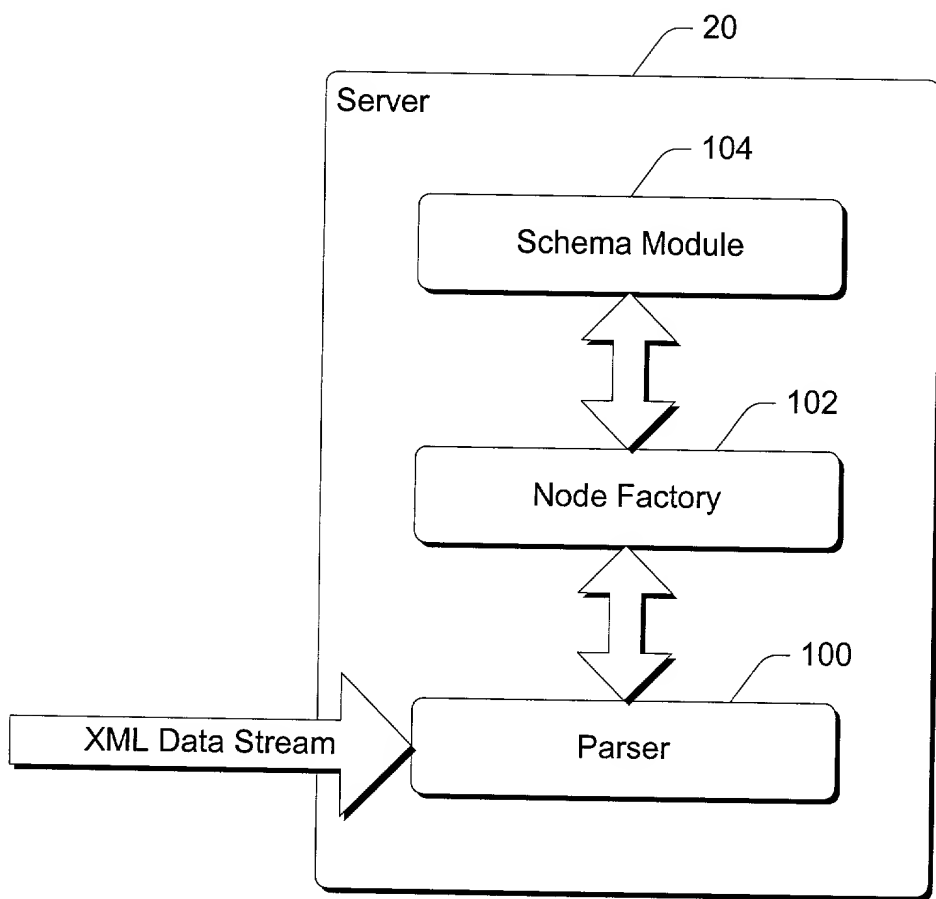

*Fig. 4*

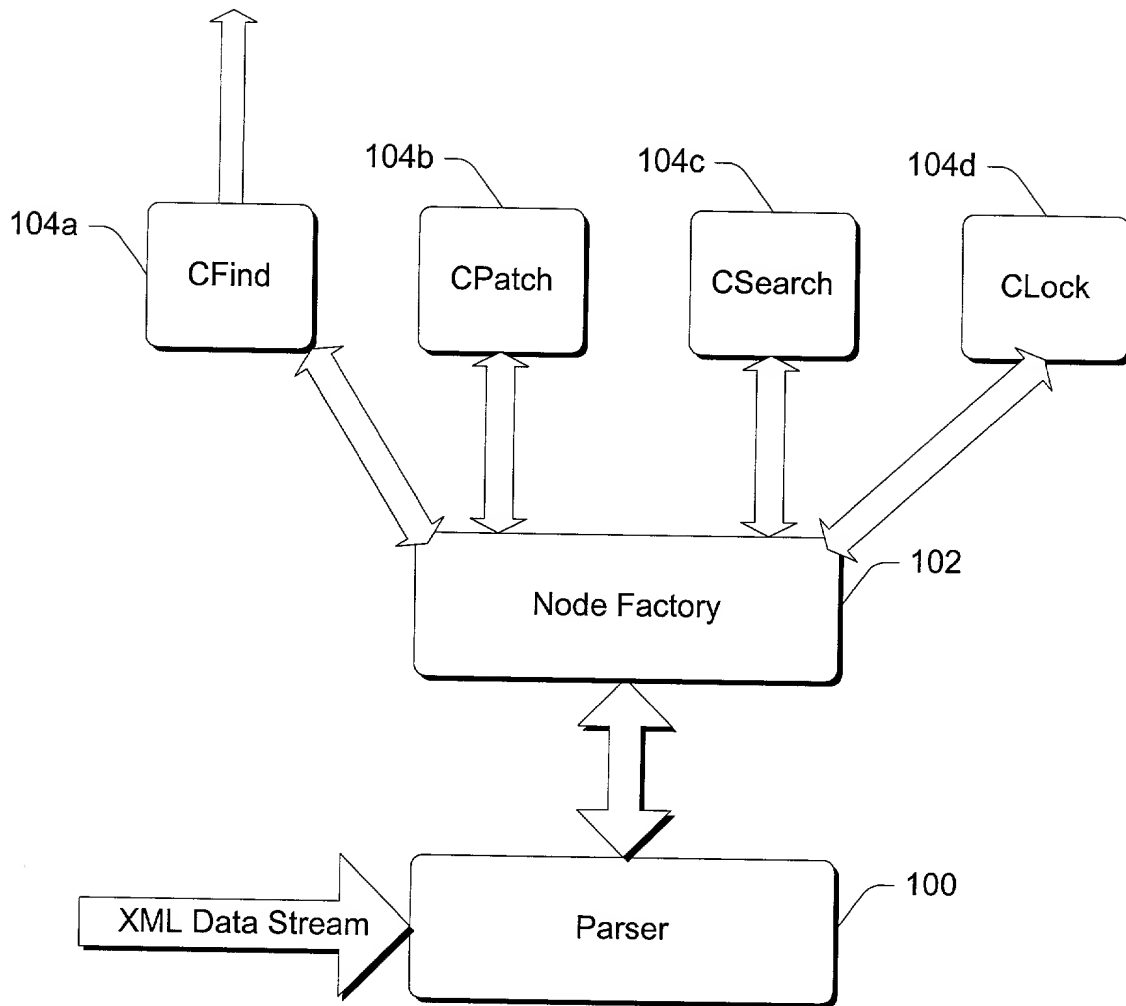*Fig. 5*

